NICOM A/S®

Kampanje periode 1.mai - 1.oktober 2024
Alle priser eks.mva og frakt

BW C04BOX-A VU 024006201

NOK 8750,-

X 196

Mobile roller cab with 6 drawers with assortment of 196 tools for universal use, in soft EVA foam trays

- ABS worktop with 6 tool trays
- 6 drawers 570x410 mm, with ball bearing slides
- Drawer bases protected by foamed rubber mats.
- Four castors Ø 125 mm: 2 fixed and 2 steering with brake.
- Front centralized safety lock
- Static load capacity: 150 kg





n°	h	max
1	80 mm	20 kg
4	110 mm	20 kg
1	160 mm	25 kg

36

BW 42	6-7-8-9-10-11-12-13-14-15-16-17-19-21-22-24 mm	BW 1128BMX	150 mm
BW 96BPC/SC9	1,5-2-2,5-3-4-5-6-8-10 mm	1201E	3,5x100-5,5x150-6,5x150 mm
BW 1719BMA8/P	200 mm	1201EN	4x30 mm
BW 1719BMA8/M	200 mm	1202E	PH1x80-PH2x100 mm
BW 1719BMA8/R	200 mm	1202EN	PH1x30

23

BW 31	Ø 2-3-4-5-6 mm	BW 1166BM	160 mm
1771	18 mm	BW 1692/3	3 m
BW 1048	250 mm	BW 1370	300 g
BW 1082BM	160 mm	BW 1390	Ø 35 mm
BW 1150BM	180 mm	BW 1771RL	10x 18 mm

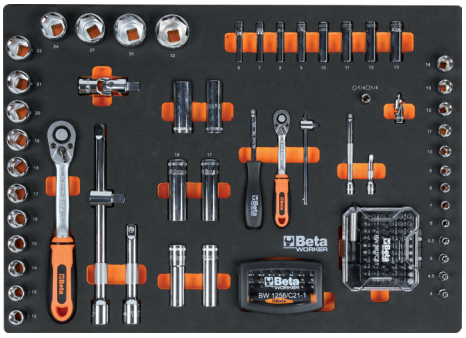

137

1/4"

BW 900	4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900L	6-7-8-9-10-11-12-13 mm
BW 895/1	1/4 - 1/4
BW 900/20	50 mm
BW 900/20L	100 mm
BW 900/25	
BW 900/30	150 mm
BW 900/42	115 mm
BW 900/55	150 mm

1/2"

BW 920A	12-13-14-15-16-17-18-19-20-21-22-24-27-30-32 mm
BW 920AL	14-15- 17-19 mm
BW 920/21	125 mm
BW 920/22	250 mm
BW 910/16F	3/8" - 1/2"
BW 920/25	
BW 920/55	260 mm
BW 956C	16- 20,8 mm

BW 861/C61 1/4

BW 861LP	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)-1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
BW 861PH	PH0(2)-PH1(7)-PH2(7)-PH3(2)
BW 861PZ	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
BW 861PE	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
BW 861TX	T9-T10-T15-T20-T25 T27-T30-T40
BW 882M1	1/4 - 1/4

BW 1256/C21-1

BW 1256LP	1,5-2-2,5 mm
BW 1256PH	PH0-PH1
BW 1256PZ	PZ0-PZ1
BW 1256PE	0,7-0,9-1,3-1,5-2-2,5-3 mm
BW 1256TX	T4-T5-T6-T7
BW 1256RTX	T8-T10-T15
4 mm	99 mm

BW 2400S 7/E-M

Mobile roller cab with 7 drawers, with assortment of 309 tools

- 7 drawers (588x367 mm), with ball bearing slides:
  5 drawers, 70 mm high
  1 drawer, 140 mm high
  1 drawer, 210 mm high
- Drawer bases protected by foamed rubber mats
- Four castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Static load capacity: 800 kg
- Thermoplastic worktop
- Built-in side bottle holder

800 kg

X 309

n°	h	max
5	70 mm	25 kg
1	140 mm	30 kg
1	210 mm	30 kg

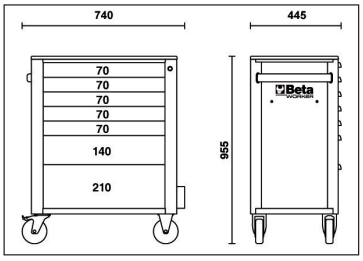

024006224	024006225	024006226

NOK 14600,-





13

BW 32	Ø 4 mm
BW 34	150 mm
BW 36	150 mm
1032	19÷60 mm
1034	19÷60 mm
1036	19÷60 mm
1038	19÷60 mm
BW 1048	250 mm
BW 1082BM	160 mm
BW 1150BM	180 mm
BW 1166BM	200 mm
BW 1370	500 g
BW 1390	Ø 35 mm

31

BW 42	6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
BW 96BPC/SC9	1,5-2-2,5-3-4-5-6-8-10 mm

159

BW 900	4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900L	4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900ME	3-4-5-6-7-8 mm
BW 900TX	T6-T7-T8-T9-T10-T15-T20-T25
BW 895/1	1/4 - 1/4
BW 900/20	50 mm
BW 900/20L	100 mm
BW 900/25	
BW 900/30	150 mm
BW 900/42	115 mm
BW 900/55	150 mm

1/4"

BW 920A	8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
BW 920AL	10-12-13-14-15-16-17-18-19-21-22 mm
BW 920PE	5-6-7-8-9-10-12-14 mm
BW 920TX	T27-T30-T40-T45-T50-T55-T60
BW 920/21	125 mm
BW 920/22	250 mm
BW 910/16F	3/8" - 1/2"
BW 920/25	
BW 920/55	260 mm

1/2"

BW 861/C61 1/4

	BW 861LP	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)-1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
	BW 861PH	PH0(2)-PH1(7)-PH2(7)-PH3(2)
	BW 861PZ	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
	BW 861PE	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
	BW 861TX	T9-T10-T15-T20-T25 T27-T30-T40
	BW 882M1	1/4 - 1/4

60

3/8"

BW 55	6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22 mm
BW 90	6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22 mm
BW 910A	6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22 mm
BW 910AL	8-10-11-12-13-14-17-19 mm
BW 910PE	4-5-6-7-8-9-10 mm
BW 910TX	T15-T20-T25-T27-T30-T40-T45
BW 910/21	125 mm
BW 910/22	150 mm
BW 910/25	
BW 910/55	205 mm
BW 920/15F	1/2" - 3/8"

46

1201E	2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
1202E	PH0x60-PH1x80-PH2x100-PH3x150 mm
1201EN	4x30 mm
1202EN	PH1x30 mm
1207E/TX	T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45

BW 1256/C21-1

	BW 1256LP	1,5-2-2,5 mm
	BW 1256PH	PH0-PH1
	BW 1256PZ	PZ0-PZ1
	BW 1256PE	0,7-0,9-1,3-1,5-2-2,5-3 mm
	BW 1256TX	T4-T5-T6-T7
	BW 1256RTX	T8-T10-T15
4 mm		99 mm

BW 2400S XL9/E-XXL

X 716

Mobile roller cab with 9 drawers, with anti-tilt system, long model, with assortment of 716 tools

- 9 drawers (882x367 mm), with ball bearing slides: 8 drawers, 70 mm high 1 drawer, 140 mm high.
- Sturdy ABS worktop, with 6 tote-trays
- Study nylon front, with built-in label holder
- Drawer bases protected by foamed rubber mats
- Four castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Static load capacity: 1000 kg
- Built-in side bottle holder

1000 kg

024006254	024006255	024006256

NOK 32990,-

n°	h	max
8	70 mm	30 kg
1	140 mm	35 kg



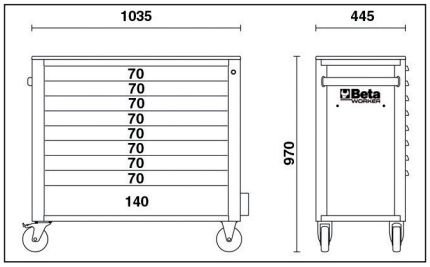

214

BW 97TX/SC8 ○ T9-T10-T15-T20-T25-T27-T30-T40
BW 97TTX ○ T8-T9-T10-T15-T20-T25-T27-T30-T40

3/8"

BW 910A	○ 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-24 mm
BW 910AL	○ 8-10-11-12-13-14-17-19 mm
BW 910FTX	○ E6-E7-E8-E10-E11-E12-E14
BW 910PE	○ 4-5-6-7-8-9-10 mm
BW 910TX	○ T15-T20-T25-T27-T30-T40-T45
BW 910/20	75 mm
BW 910/22	150 mm
BW 910/25	
BW 910/55	200 mm
BW 920/15F	□ 1/2" - ■ 3/8"

1/4"

BW 900	○ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900L	○ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900FTX	○ E4-E5-E6-E7-E8-E10
BW 900ME	○ 3-4-5-6-7-8-10 mm
BW 900TX	○ T6-T7-T8-T9-T10-T15-T20-T25
BW 900LP	◐ 0,8x4-1,0x5,5-1,2x6,5-1,2x8 mm
BW 900PH	PH0-PH1-PH2-PH3
BW 895/1	14"
BW 900/20	50 mm
BW 900/20L	100 mm
BW 900/25	
BW 900/30	150 mm
BW 900/42	115 mm
BW 900/55	150 mm

BW 861/C61

◐	**BW 861LP**	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)-1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
⊕	**BW 861PH**	PH0(2)-PH1(7)-PH2(7)-PH3(2)
⊕	**BW 861PZ**	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
○	**BW 861PE**	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
✪	**BW 861TX**	T9-T10-T15-T20-T25 T27-T30-T40
	BW 882M1	○ 1/4 - ● 1/4

BW 1256/C21-1

◐	**BW 1256LP**	1,5-2-2,5 mm
⊕	**BW 1256PH**	PH0-PH1
⊕	**BW 1256PZ**	PZ0-PZ1
○	**BW 1256PE**	0,7-0,9-1,3-1,5-2-2,5-3 mm
✪	**BW 1256TX**	T4-T5-T6-T7
✪	**BW 1256RTX**	T8-T10-T15
4 mm		99 mm

97

1/2"

BW 720L	10-12-13-15-17-19-21-24-27-30 mm
BW 720/21	125 mm
BW 720/25	64 mm
BW 910/16F	☐ 3/8" - ■ 1/2"
BW 920/16	☐ 1/2" - ■ 3/4"
BW 920A	8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
BW 920AL	10-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm
BW 920FTX	E10-E12-E14-E16-E18-E20-E22-E24
BW 920PE	5-6-7-8-9-10-12-14 mm
BW 920PE-L	5-6-7-8-9-10-12-14 mm
BW 920PE-XL	10-12-14 mm
BW 920TX	T27-T30-T40-T45-T50-T55-T60
BW 920TX-L	T30-T40-T45-T50-T55-T60-T70
BW 920TX-XL	T45-T50-T55
BW 920/21	125 mm
BW 920/22	250 mm
BW 920/25	
BW 920/55	260 mm

35

943E	5-5,5-6-7-8-9-10-11-12-13-14 mm
1201E	2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
1202E	PH0x60-PH1x80-PH2x100-PH3x150 mm
1201EN	4x30 mm
1202EN	PH1x30 mm
1207E/TX	T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45

45

BW 42	6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
BW 55	6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm
BW 141	8-9-10-11-12-13-14-15-16-17-18-19 mm

235

BW 96BPC/SC9	1,5-2-2,5-3-4-5-6-8-10 mm
BW 410/SP19	1÷10 mm x 0,5 mm
BW 666N/20	40÷20 Nm
BW 720	10-12-13-15-17-19-21-24-27-30 mm
BW 867PE	4-5-6-7-8-10-12 mm
BW 867PE/L	4-5-6-7-8-10-12 mm
BW 867XZN	4-5-6-7-8-10-12 mm
BW 867XZN/L	5-6-8-10-12 mm
BW 867TX	T20-T25-T30-T40-T45-T50-T55
BW 867TX/L	T20-T25-T30-T40-T45-T50-T55
BW 867RTX	T20-T25-T30-T40-T45-T50-T55
BW 867RTX/L	T20-T25-T30-T40-T45-T50-T55
BW 867/1	10 mm - ☐ 3/8"
BW 867/2	10 mm - ☐ 1/2"
BW 867RIBE	5-6-7-8-9-10-11-12-13 mm
BW 867RIBE/L	5-6-7-8-9-10-11-12-13 mm
BW 1253	0,5x100 mm
BW 1257LP	2,0-2,5-3,0 mm
BW 1257PH	PH00-PH0-PH1
BW 1257TX	T5-T6-T7-T8-T9-T10
BW 1728BM	
BW 1728LA	

27

BW 30	Ø 2-3-4 mm	1034	19÷60 mm	BW 1150BM	180 mm
BW 31	Ø 2-3-4-5-6-8 mm	1036	19÷60 mm	BW 1166BM	200 mm
BW 32	Ø 4 mm	1038	19÷60 mm	BW 1168BM	200 mm
BW 34	150-175 mm	BW 1048	250 mm	BW 1370	300 g
BW 36	150 mm	BW 1052	190-240 mm	BW 1380	1000 g
1032	19÷60 mm	BW 1082BM	160 mm	BW 1390	Ø 35 mm

30

BW 90	6x7-8x9-10x11-12x13-14x15-16x17-18x19 mm
BW 96T	2-2,5-3-4-5-6-7-8-10 mm
BW 1098	220 mm
BW 1650	150 mm
BW 1682	300 mm
BW 1687/S4	
BW 192	8x10/12x13 mm
BW 192	16x17/18x19 mm
BW 1719BMA8/Q	■ 200 mm
BW 1719BMA8/T	▲ 200 mm
BW 1719BMA8/P	▮ 200 mm
BW 1719BMA8/M	◗ 200 mm
BW 1719BMA8/R	● 200 mm

33

BW 943FL	6-7-8 mm
BW 1692/5	5 m
BW 1712T	148÷665 mm
BW 1606T	0,08÷6 mm²
BW 1608	0,5÷6 mm²
BW 1725	420 mm
BW 1725CR	250 mm
BW 1737NX	270 mm
1771	18 mm
BW 1771RL	10x 18 mm
BW 1833S	200 lumen
BW 1715	
BW 1720/B6	
BW 1128BMX	150 mm
BW 1149F	0,2÷6 mm²
BW 1602	0,75÷6 mm²
BW 1603	1,25÷5,5 mm²

BW C22E

022006130

NOK 1148,-

Portable tool chest with 3 drawers

- 3 drawers (435x210x50 mm), with ball bearing slides
- Upper compartment (505x256x60 mm)
- Front centralized lock
- Handle on lid
- Retractable side handles for ease of handling

n°	h	max
3	50 mm	5 kg

20 kg

510x268x350 mm

BW 2200E/21

022006201

NOK 3850,-

Portable tool chest with assortment of 159 tools,

integrated soft foam tray

1/4" 1/2"

510x268x350 mm

X 159

115

BW 861/C61		BW 900	4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 1256/C21-1	4 mm	BW 900/20	50 mm
BW 900/55	150 mm	BW 900/20L	100 mm
BW 920/55	260 mm	BW 920/25	
BW 900/25		BW 920/22	250 mm
BW 900/42	115 mm	BW 910/16F	3/8" - 1/2"
BW 895/1		BW 920A	13-14-15-16-17-18-19-21-22 mm

22

BW 42	8-10-11-12-13-14-15-17-19 mm	BW 1150BM	180 mm
BW 1082BM	160 mm	1770A	9 mm
		BW 1770RL	10x

18

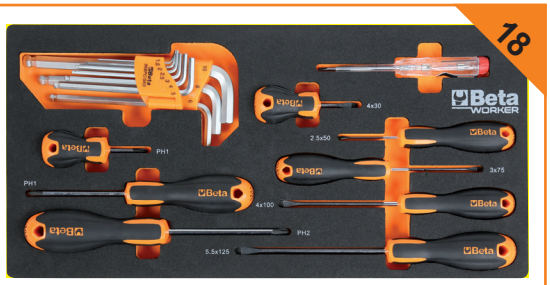

BW 96BPC/SC9	1,5-2-2,5-3-4-5-6-8-10 mm	1202E	PH1X80-PH2X100
1201E	2,5x50-3x75-4x100-5,5x125 mm	1202EN	PH1X30 mm
1201EN	4X30	BW 1253	3,5x100 mm

	BW 1048	250 mm
	BW 1128BMX	150 mm
	BW 1370	300 g
	BW 1692	5 m

BW 2056E

020566010

NOK 3990,-

1/4" 1/2"

Tool case with assortment of 163 GENERAL MAINTENANCE TOOLS

- Removable interior tool panel
- Integrated soft foam tray

465x330x170 mm

SUITCASE 163 TOOLS

	BW 42		8-9-10-11-12-13-14-15-16-17-18-19 mm		1202E		PH1x80-PH2x100 mm
	BW 96BPC/SC9		1,5-2-2,5-3-4-5-6-8-10 mm		1209E/PZ		PZ1x80-PZ2x100 mm
	BW 111		250 mm		BW 1128BMX		150 mm
	BW 1048		250 mm		BW 1253		3,5x100 mm
	BW 1082BM		160 mm		BW 1370		300 g
	BW 1150BM		180 mm		BW 1692/5		5 m
	BW 1166BM		160 mm		BW 1725CR		150 mm
	1201E		2,5x50-3x75-4x125-5,5x150-6,5x150-8x150 mm		1771		18 mm

1/4"

	BW 895/1		⬡ 1/4 - □ 1/4
	BW 900		4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
	BW 900/20		50 mm
	BW 900/20L		100 mm
	BW 900/25		
	BW 900/30		150 mm
	BW 900/42		115 mm
	BW 900/55		150 mm

1/2"

	BW 920A		10-11-12-13-14-15-16-17-18-19-21-22-24 mm
	BW 920/21		125 mm
	BW 920/22		250 mm
	BW 910/16F		□ 3/8" - ■ 1/2"
	BW 920/25		
	BW 920/55		260 mm

BW 861/C61

	BW 861LP	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)-1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
	BW 861PH	PH0(2)-PH1(7)-PH2(7)-PH3(2)
	BW 861PZ	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
	BW 861PE	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
	BW 861TX	T9-T10-T15-T20-T25 T27-T30-T40
	BW 882M1	⬡ 1/4 - ● 1/4

BW 1256/C21-1

	BW 1256LP	1,5-2-2,5 mm
	BW 1256PH	PH0-PH1
	BW 1256PZ	PZ0-PZ1
	BW 1256PE	0,7-0,9-1,3-1,5-2-2,5-3 mm
	BW 1256TX	T4-T5-T6-T7
	BW 1256RTX	T8-T10-T15
4 mm		99 mm

RSC24AXL/9 024004297

NOK 12950,-

Mobile roller cab,
WITH ANTI-TILT SYSTEM, long model

- New ABS reinforced worktop with anti-fall edges, eight holes for accommodating screwdrivers and 6 tote trays
- **Sturdy nylon front, with built-in label holder.**
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Built-in side bottle holder (can be applied on both sides)
- Each drawer can accommodate **up to 6 EVA foam or ABS thermoformed trays**

Following accessories can be added:

- Wood worktop 2400 RSC24/PL
- Document holder 2400 RSC24/PD-N
- Paper roll holder 2400 RSC24/PC-A
- Bottle holder for mobile roller cab 2400 RSC24/PF-N



970 mm
445 mm
1035 mm

2400-COVER RSC24AXL 024000930

NOK 290,-

Nylon cover for mobile roller cabs
RSC24AXL, RSC24L, RSC24L-CAB

2400 RSC24/PD-N 024004908

NOK 375,-

Document holder for mobile roller cab RSC24, RSC24A, RSC24AXL

Beta RSC24

2400 RSC24/PD-N
RAL9005

2400 RSC24/PF-N 024004906

NOK 295,-

Bottle holder for mobile roller cab
RSC24, RSC24A, RSC24AXL



2400S RSC24/PF-N
RAL9005

C41H

Two-module tool trolley

- Sheet metal frame and plastic tops, synonymous with remarkable sturdiness and reduced weight
- 2 detachable modules:
  1 upper tool box,
  1 module with 2 drawers 95 mm in height,
  1 pull-out case made of plastic, 66 mm high,
  and 1 drawer 295 mm in height
- Oversized castors (160 mm), built into frame for easy transport - for example, on steps
- Side centralized lock for closing drawers of lower module
- Drawers with ball bearing slides and double closing hook
- Telescopic aluminium handle
- Small tool holder built into upper tool box
- Lower drawer with double ballbearing slide

041000002 041000021
041000024 041000006
041000012 041000008
041000010 041000005

NOK 4750,-

M209 024500209 NOK 730,-

10

1260N	4x30 mm
1264	2,5x60 - 3x100 - 4x125 - 5x150 - 6,5x150 mm
1262	PH0x60 - PH1x80 - PH2x100 mm
1262N	PH1x30 mm

Beta EVOX

820 g

M214 024500214 NOK 385,-

7

1201E	2,5x50 - 3x75 - 3,5x100 - 4x125 - 5,5x100 - 5,5x150 - 6,5x150 mm

500 g

M216 024500216 NOK 419,-

6

1202E	PH0x60 - PH1x80 - PH1x120 - PH2x100 - PH2x150 - PH3x150 mm

450 g

M213 024500213 NOK 1739,-

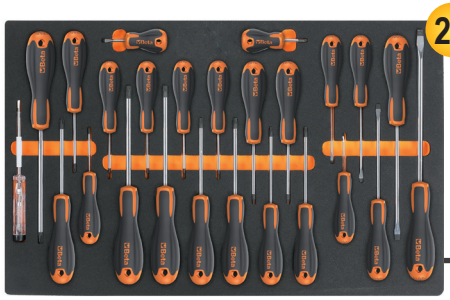

25

Beta EVOX

1,8 kg

1201E	2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
1201EN	4x30 mm
1202E	PH0x60-PH1x80-PH2x100-PH3x150 mm
1202EN	PH1X30 mm
1207E/TX	T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45
1253	

M217 024500217 NOK 525,-

7

1207E/TX	T6 - T7 - T8 - T9 - T10 - T15 - T20

500 g

1203E/D8P 012031018

NOK 369,-

Set of 8 screwdrivers

1201E 2,5x50-3x75-4x100-5,5x100 6,5x150 mm
1202E PH0x60-PH1x80-PH2x100 mm

Beta EVOX
THE EVOLUTION OF THE SCREWDRIVER!

1207E/TX-D7 012071207

NOK 449,-

Set of 7 screwdrivers

1207E/TX T6-T8-T10-T15 T20-T25-T30

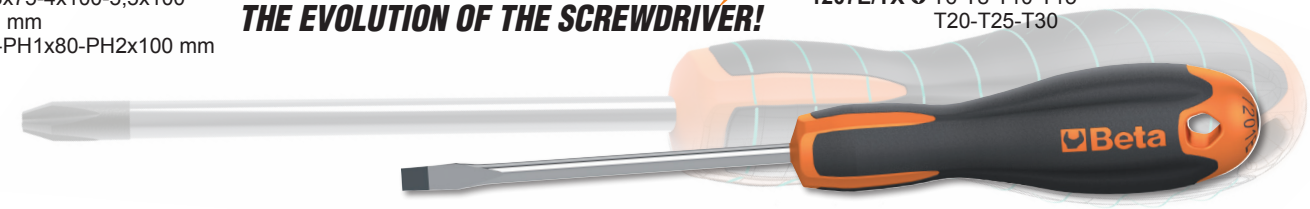

1263MC/D8 012632008

NOK 549,-

Set of 8 coloured screwdrivers

1260MC 2,5x50-3x75-4x100-5,5x125 6,5x150 mm
1262MC PH0x60-PH1x80 PH2x100 mm

Beta GRIP

900/C39N 009000947

NOK 1625,-

1/4" 1/4

Assortment of 11 hexagon sockets, 21 bits and 7 accessories,
in plastic case

150x97x53 mm

	900		5-5,5-6-7-8-9-10-11-12-13-14 mm	11
	900/20	1/4"	50 mm	1
	900/20L	1/4"	100 mm	1
	900/25	1/4"		1
	900BG/30C	1/4"	128 mm	1
	892/0		■ ¼ - ⬢ ¼	1
	895/1		⬡ ¼ - □ ¼	1
	861LP		0,6x4,5-1,2x6,5-1,2x8 mm	3
	861PH		PH1-PH2-PH3	3
	861PZ		PZ1-PZ2-PZ3	3
	861PE		2,5-3-4-5-6 mm	5
	861RTX		T10-T15-T20-T25-T27-T30-T40	7
	900/55Z		126 mm	1

Reversible ratchet



	L mm	Ø mm	A mm	■	teeth		NOK
910/55	200	30	33	3/8"	72	009100882	**NOK 425,-**
920/55	275	40	43	1/2"	72	009200882	**NOK 495,-**

186 8-32 001860008

NOK 390,-

Self-locking wrench with automatic take-up device for hexagons, 8 to 32 mm

Ideal for hexagon, Spline, square and Torx® head screws, including damaged screws

L 260 mm

SPLINE® 12 sides | square | Torx® | hexagon | damaged screw 70%



THE TORQUE WRENCH THAT DOES NOT REQUIRE RELEASING TENSION

Even if tension is not released, the number of cycles, durability and tightening accuracy as required by reference standards are guaranteed.

In order to confirm these parameters, Beta Utensili's Research & Development Department performed numerous durability tests at the in-house laboratories as at hundreds of end users.

This result has been obtained through:

- **the use of the best-performing currently available materials;**
- **special heat treatments on interior parts.**

ZERO-RESET

100% MADE IN ITALY

The Zero-Reset torque wrench was entirely designed and developed in-house and is manufactured at Beta Utensili's factories in Italy, using 100% Italian-made parts.

ZERO-RESET TECHNOLOGY: Based on higher-performance materials and improved heat treatment of both the spring and the component parts of the adjustment system, the wrench no longer requires releasing tension after use.

EASY SETTINGS: The graduated scale allows minimum interval fractions to be set up (in tenths of Nm/lbf.ft).

IMPROVED VISIBILITY: Double graduation for clearer, simpler torque visibility.

666

1/4" 3/8" 1/2"

UNI EN ISO 6789

ZERO-RESET click-type torque wrenches with reversible ratchets, for right-hand tightening, torque accuracy: ± 3%

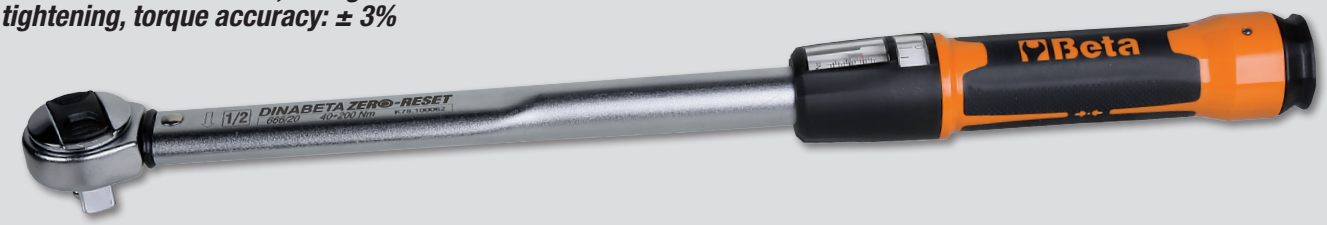

	Nm	■		L (mm)	g		NOK
666/2	5÷25	1/4"	0,05	273	395	006660702	NOK 2175,-
666/5	10÷50	3/8"	0,25	342	680	006660705	NOK 1980,-
666/10	20÷100	3/8"	0,25	385	760	006660710	NOK 1980,-
666/20	40÷200	1/2"	0,5	471	1020	006660720	NOK 2175,-
666/30	60÷300	1/2"	1	600	1271	006660730	NOK 2480,-

665

CE 3/8" 1/2"

UNI EN 26789 ISO 6789

Mechanical torque wrench with digital setting and reversible ratchet, for right-hand tightening, torque accuracy ± 3%

- Auto power off after 30" when torque is set under minimum torque threshold
- Display will remain on with set torque value
- Torque setting to decimal digit
- Power supply: 1 battery 3V (included)

QUICK, ACCURATE DIGITAL TORQUE ADJUSTMENT

	Nm mm	■	D (mm)	A (mm)	L (mm)	g		NOK
665/6	10÷60	3/8	30	33	335	655	006650006	NOK 2175,-
665/20	40÷200	1/2	40	43	470	995	006650020	NOK 2375,-





1838POCKET 018380080 NOK 545,-

Articulated pocket LED spotlight, with dual light beam and WIRELESS CHARGING

- Rechargeable 3.7V 2600mAh Li-ion battery
- 2 charging modes:
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 4.5 h with wireless charging base
  - 4 h with power supply
- Battery life: - main light: 3-9h
  - spot light: 4.5 h
- 3-LED battery level indicator
- Can be rotated 210°
- Nonslip rubber body
- Magnetic base
- 1 magnet on base
- Supplied with a USB-C cable
- IP65
- IK07

800 LUMEN

- **Dual light emission:**
  - main light: LED COB, 3 light intensities: 160 - 400 - 800 lumens
  - spot light: LED SMD, 250 lumens
- **Lighting angle:**
  - main light: 160°
  - spot light: 18°

1838SW 018380142 NOK 845,-

Rechargeable, articulated LED inspection lamp and WIRELESS CHARGING

- Rechargeable 3.6V 3.350mAh Li-ion battery
- 2 charging modes:
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 6.5h with wireless charging base
  - 4.5h with power supply
- Battery life: - front: 3-5h
  - spot (head): 7h
- 3-LED battery level indicator
- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- Magnets on base and back
- IP65
- IK07

200 LUMEN

1000 LUMEN

- **Dual light emission:**
  - front: LED COB, 3 light intensities: 250 - 500 - 1000 lumens
  - spot (head): LED SMD, 200 lumens



1760B 017600012

NOK 1690,-

Digital multimeter

A: AC/DC
V: AC/DC

SPECIFICATIONS
DC voltage: 200 mV-2/20/200/1000V
AC voltage: 2-20/200/700V
DC current: 2/20/200 mA-20 A
AC current: 2/200 mA- 20 A
Resistance: 200Ω - 2/20/200 kΩ - 2/20 MΩ
Capacity: 2/20/200 nF - 2/200 µF
Temperature: -20° + 1000°C/ -4 °F ~ +2000°F
Frequency: 20kHz
Power supply: 1 9V battery (included)

1760S 017600022

NOK 790,-

IP40

Compact digital multimeter

- IP40 protection
- Autoranging
- Large direct reading display, backlit, blue
- Self-power down
- Low battery indication
- Supplied in a soft case
- CAT III 600V
- TRUE RMS (actual effective value)

Measurable parameters:
DC voltage: 200 mV-2/20/200/600V
AC voltage: 100/600V
DC current: 200 mA-10 A
AC current: 0,01-10 A
Resistance: 200Ω - 2/20/200 kΩ - 2 MΩ
Diode test: 0.4 ÷ 0.7
Power supply: 2 1.5V batteries, type AAA

3033E/3T 030330130

NOK 3290,-

Hydraulic jack, 3 t

- Controlled descent speed
- Nylon wheels

H min-Max mm	L mm	L1 mm
95÷515	700	370

3030H/2T 030300220

NOK 5475,-

High-lift hydraulic jack, 2 t, with 6 wheels

Makes it possible to work on vehicles that are high from the ground and have a long shock absorber travel

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

H min-Max mm	L mm	L1 mm
85÷780	1010	300

720LC/C3 007200653

NOK 385,-

Set of 3 impact sockets for wheel nuts, with polymeric inserts,
in plastic case

○ 17-19-21 mm

148X132X44 MM

3029L/2T 030290120

NOK 3985,-

Long, lowered hydraulic jack, 2 t

Makes it possible to work on vehicles with a reduced height from the ground and internal lifting point

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

H min-Max mm	L mm	L1 mm
75÷530	930	295

1949U5 019490030

NOK 298,-

Progressive blow gun with 5 nozzles

Features:

- Hard-wearing, shockproof composite material body
- 3 steel nozzles, 100/160/320 mm, scratchproof, protective rubber tips
- 1 "Turbo" nozzle made of fibreglass-reinforced nylon with safety tip
- 1 revolving nozzle, 100 mm, made of fibreglass-reinforced nylon
- With quick fixing system

Threaded brass insert	1/4" GAS
Working pressure	10 bar
Maximum working pressure	10 bar
Mean air consumption	280 l/min
Working temperature	-10°C ÷ 85° C

NOK 2248,-

1924XM 019240030 NOK 2189

3/8"

Compact reversible impact wrench

Features:
- Single hammer impulse device
- Super compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook

The Beta 1924XM impact wrench delivers high performance in super compact dimensions. In addition, you can choose from 3 different power screwing positions, for optimal adjustment as needed.

Free speed	rpm	9.000
Impulse device		Single hammer
Max. torque	Nm	**515**
Bolt capacity	CI 8.8	M16●24 mm
Bolt capacity	CI 12.9	M14●21 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	122

1927P 019270008 NOK 749,-

1/2"

Reversible impact wrench

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle

Free speed	rpm	7.500
Impulse device		Double hammer
Max. torque	Nm	**1750**
Bolt capacity	CI 8.8	M24●36 mm
Bolt capacity	CI 12.9	M20●30 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	290

1927XM 019270030 NOK 2290,-

1/2"

Compact reversible impact wrench

- Single hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook

ULTRA COMPACT



Free speed	rpm	10.000
Impulse device		Single hammer
Max. torque	Nm	**770**
Bolt capacity	CI 8.8	M22●34 mm
Bolt capacity	CI 12.9	M18●27 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	122

1927G 019270050 NOK 3295,-

1/2"

Compact reversible impact wrench

- Single hammer impulse device
- Aluminium motor housing with composite handle
- One-handed reverse control
- Three power adjustable screwing positions
- Exhaust through handle
- Head motor with direct rotation transmission to output drive, resulting in improved body balancing and increased handiness

Free speed	rpm	8.500
Impulse device		Single hammer
Maximum torque	Nm	**325**
Bolt capacity	CI 8.8	M16●24 mm
Bolt capacity	CI 12.9	M14●21 mm
Air inlet	GAS	1/4"
Working pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	113
Weight	kg	1,2

1928XM 019280030 NOK 4895,-

3/4"

Compact reversible impact wrench

- Double hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle

ULTRA COMPACT AND POWERFUL

Free speed	rpm	4.800
Impulse device		Double hammer
Max. torque	Nm	**1600**
Bolt capacity	CI 8.8	M27●41 mm
Bolt capacity	CI 12.9	M24●36 mm
Air inlet	GAS	3/8"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	175

DIGITAL

1949DGT/2 019490021 NOK 1075,-

Digital tyre inflator

- 4 units of measurement, bar/psi/kpa/kgf
- Backlit LCD display
- Resolution: 0.05 bar
- Self-power off after 1.5 minutes

- EVA OUTSOLE WITH DURABLE NITRILE RUBBER TREAD
- HEEL STABILITY SUPPORT
- COMPOSITE FIBRE PENETRATION-PROOF INSOLE

7372B — NOK 1090,-

O-Gravity woven fabric shoe, ultralightweight, hard-wearing and ultrabreathable

- Heel stability support, traditional lacing
- Wide fit

EU	UK	
38	5	073720038
39	6	073720039
40	6,5	073720040
41	7	073720041
42	8	073720042
43	9	073720043
44	10	073720044
45	10,5	073720045
46	11	073720046
47	12	073720047
48	13	073720048

S1P HRO SRC | NUBES | 450 g

7381N — NOK 1285,-

Water resistant EXTREME O-GRAVITY work shoes

- Composite toe cap
- Waterproof, with bootie membrane, windproof, highly breathable
- Wide fit

EU	UK	
38	5	073810038
39	6	073810039
40	6,5	073810040
41	7	073810041
42	8	073810042
43	9	073810043
44	10	073810044
45	10,5	073810045
46	11	073810046
47	12	073810047
48	13	073810048

WATER RESISTANT

S3 HRO SRC WR | EXTREME | 500 g

7900G — NOK 485,-

Work trousers

- Inserts and knee pads made of "Oxford" polyester/PU, 220 g/m²
- Knee pad pockets

XS	46	079000800
S	48	079000801
M	50	079000802
L	52	079000803
XL	54	079000804
XXL	56	079000805
XXXL	58	079000806
XXXXL	60	079000807

- Metal zip closure
- Two deep front pockets with small tool inserts with strap closure
- Large left-leg pocket with strap closure, mobile phone pocket and badge insert
- Large rear pockets with "Oxford" reinforcement and strap closure
- Ruler pocket and hammer loop

7901G — NOK 430,-

Work Bermuda shorts

- Inserts in "Oxford" polyester/PU, 220 g/m²

XS	46	079010800
S	48	079010801
M	50	079010802
L	52	079010803
XL	54	079010804
XXL	56	079010805
XXXL	58	079010806
XXXXL	60	079010807

7830ST — NOK 585,-

Stretch work trousers Slim fit

T/C twill, 63% polyester, 34% cotton, 3% stretch fabric, 250 g/m²

- Slim fit
- Tearproof crotch
- Stretch waistband on sides
- Two large front pockets, one with small pocket
- Two rear pockets with strap closure
- Large left-side pocket with strap closure and badge insert
- Ruler pocket and hammer loop
- Knee pad inserts

STRETCH
SLIM FIT

XS	46	078300000
S	48	078300001
M	50	078300002
L	52	078300003
XL	54	078300004
XXL	56	078300005
XXXL	58	078300006

SAFETY FOOTWEAR AND WORKWEAR

7637G

NOK 685,-

Technical fleece sweatshirt with softshell fabric inserts

- Main fabric: fleece, 100% polyester, 250 g/m²
- Insert: softshell 100D, with bound fleece, 270 g/m²

PROTECTION
The fabric used makes the garment warm and comfortable, while providing cold protection during work.
COMFORT AND DURABILITY
Ergonomic, slim design, for an extremely comfortable and functional garment. Softshell inserts, for further strength and increased durability.
MODERN LOOK
Captivating design and the combination of two different materials make the sweatshirt ideal for both work and free time.

XS	076370000
S	076370001
M	076370002
L	076370003
XL	076370004
XXL	076370005
XXXL	076370006

9502TL

NOK 489,-

Polo shirt, 100% pique cotton, 210 g/m²

S	48	095020051
M	50	095020052
L	52	095020053
XL	54	095020054
XXL	56	095020055

7093BC

070930009

NOK 289,-

Safety glasses with clear polycarbonate lenses

EN166:2001
EN172
2C-1.2 1F

099804728

8 054809 604428

NICOM A/S®

Holmengata 24, 1394 NESBRU Tlf: 22 666 777 NO948907143MVA
www.nicom.no E-mail: nicom@nicom.no NordeaBank 6024 06 07436