

Beta Action



NICOM A/S[®]

Kampanje periode 1.mai - 1.oktober 2025

Alle priser eks.mva og frakt

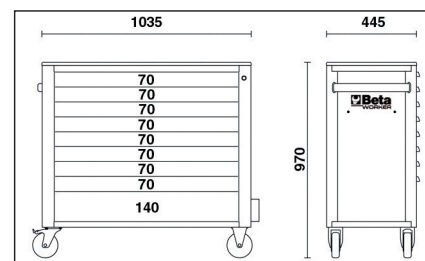

BW 2400S XL9/E-XXL**NOK 34990,-**

**Mobile roller cab with 9 drawers,
with anti-tilt system, long model,
with assortment of 716 tools**

- 9 drawers (882x367 mm),
with ball bearing slides:
8 drawers, 70 mm high
1 drawer, 140 mm high.
- Sturdy ABS worktop, with 6 tote-trays
- Study nylon front, with built-in label holder
- Drawer bases protected
by foamed rubber mats
- Four castors Ø 125 mm:
2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Static load capacity: 1000 kg
- Built-in side bottle holder

 **1000 kg**
**024006254****024006255****024006256**
x
716

n°	h	max
8	70 mm	30 kg
1	140 mm	35 kg

**214**

BW 97TX/SC8 ○ T9-T10-T15-T20-T25-T27-T30-T40
BW 97TTX ○ T8-T9-T10-T15-T20-T25-T27-T30-T40

38" **BW 910A** ○ 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-24 mm
BW 910AL ○ 8-10-11-12-13-14-17-19 mm
BW 910FTX ⊗ E6-E7-E8-E10-E11-E12-E14
BW 910PE ○ 4-5-6-7-8-9-10 mm
BW 910TX ○ T15-T20-T25-T27-T30-T40-T45

BW 910/20 75 mm
BW 910/22 150 mm
BW 910/25 50 mm
BW 910/55 ⊗ 200 mm
BW 920/15F □ 1/2" - 3/8"

1/4" **BW 900** ○ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900L ○ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
BW 900FTX ⊗ E4-E5-E6-E7-E8-E10
BW 900ME ○ 3-4-5-6-7-8-10 mm
BW 900TX ○ T6-T7-T8-T9-T10-T15-T20-T25
BW 900LP ● 0,8x4-1,0x5,5-1,2x6,5-1,2x8 mm

BW 900PH ⊕ PH0-PH1-PH2-PH3
BW 895/1 ⊗ 14"
BW 900/20 50 mm
BW 900/20L 100 mm
BW 900/25 50 mm
BW 900/30 150 mm
BW 900/42 115 mm
BW 900/55 ⊗ 150 mm

BW 861/C61

	BW 861LP	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)-1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
	BW 861PH	PH0(2)-PH1(7)-PH2(7)-PH3(2)
	BW 861PZ	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
	BW 861PE	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
	BW 861TX	T9-T10-T15-T20-T25-T27-T30-T40
	BW 882M1	○ 1/4 - ● 1/4

BW 1256/C21-1

	BW 1256LP	1,5-2-2,5 mm
	BW 1256PH	PH0-PH1
	BW 1256PZ	PZ0-PZ1
	BW 1256PE	0,7-0,9-1,3-1,5-2-2,5-3 mm
	BW 1256TX	T4-T5-T6-T7
	BW 1256RTX	T8-T10-T15
	4 mm	99 mm





BW 720L ○ 10-12-13-15-17-19-21-24-27-30 mm
 BW 720/21 125 mm
 BW 720/25 64 mm
 BW 910/16F □ 3/8" - ■ 1/2"
 BW 920/16 □ 1/2" - ■ 3/4"
 BW 920A ○ 8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
 BW 920AL ○ 10-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm
 BW 920FTX ⊗ E10-E12-E14-E16-E18-E20-E22-E24
 BW 920PE ○ 5-6-7-8-9-10-12-14 mm
 BW 920PE-L ○ 5-6-7-8-9-10-12-14 mm
 BW 920PE-XL ○ 10-12-14 mm
 BW 920TX ○ T27-T30-T40-T45-T50-T55-T60
 BW 920TX-L ○ T30-T40-T45-T50-T55-T60-T70
 BW 920TX-XL ○ T45-T50-T55
 BW 920/21 125 mm
 BW 920/22 250 mm
 BW 920/25
 BW 920/55 ⊗ 260 mm



943E ○ 5-5.5-6-7-8-9-10-11-12-13-14 mm
 1201E ② 2.5x50-3x75-4x100-5.5x125-6.5x150-8x200 mm
 1202E ○ PH0x60-PH1x80-PH2x100-PH3x150 mm
 1201EN ④ 4x30 mm
 1202EN ○ PH1x30 mm
 1207E/TX ○ T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45



BW 42  6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
BW 55  6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm
BW 141 8-9-10-11-12-13-14-15-16-17-18-19 mm



BW 96BPC/SC9	○ 1,5-2-5-3-4-5-6-8-10 mm	BW 867RTX/L	⊗ T20-T25-T30-T40-T45-T50-T55
BW 410D/SP19	1+10 mm x 0,5 mm	BW 867/1	○ 10 mm - □ 3/8"
BW 666N/20	40÷20 Nm	BW 867/2	○ 10 mm - □ 1/2"
BW 720	○ 10-12-13-15-17-19-21-24-27-30 mm	BW 867RIBE	⊗ 5-6-7-8-9-10-11-12-13 mm
BW 867PE	○ 4-5-6-7-8-10-12 mm	BW 867RIBE/L	⊗ 5-6-7-8-9-10-11-12-13 mm
BW 867PE/L	○ 4-5-6-7-8-10-12 mm	BW 1253	● 0,5x100 mm
BW 867XZN	○ 4-5-6-7-8-10-12 mm	BW 1257LP	● 2,0-2,5-3,0 mm
BW 867XZN/L	○ 5-6-8-10-12 mm	BW 1257PH	⊗ PH00-PH0-PH1
BW 867TX	⊗ T20-T25-T30-T40-T45-T50-T55	BW 1257TX	⊗ T5-T6-T7-T8-T9-T10
BW 867TX/L	⊗ T20-T25-T30-T40-T45-T50-T55	BW 1728BM	
BW 867RTX	⊗ T20-T25-T30-T40-T45-T50-T55	BW 1728LA	



BW 30	Ø 2-3-4 mm	1034	○ 19÷60 mm	BW 1150BM	≡ 180 mm
BW 31	Ø 2-3-4-5-6-8 mm	1036	● 19÷60 mm	BW 1166BM	● 200 mm
BW 32	Ø 4 mm	1038	● 19÷60 mm	BW 1168BM	● 200 mm
BW 34	150-175 mm	BW 1048	250 mm	BW 1370	🔧 300 g
BW 36	150 mm	BW 1052	190-240 mm	BW 1380	🔧 1000 g
1032	○ 19÷60 mm	BW 1082BM	⚡ 160 mm	BW 1390	Ø 35 mm



BW 90	 6x7-8x9-10x11-12x13-14x15-16x17-18x19 mm	BW 192	8x10/12x13 mm
BW 96T	● 2-2,5-3-4-5-6-7-8-10 mm	BW 192	16x17/18x19 mm
BW 1098	220 mm	BW 1719BMA8/Q	■ 200 mm
BW 1650	150 mm	BW 1719BMA8/T	▲ 200 mm
BW 1682	300 mm	BW 1719BMA8/P	! 200 mm
BW 1687/S4		BW 1719BMA8/M	● 200 mm
		BW 1719BMA8/R	● 200 mm



BW 943FL	○ 6-7-8 mm	1771	18 mm
BW 1692/5	5 m	BW 1771RL	 18 mm
BW 1712T	148+665 mm	BW 1833S	200 lumen
BW 1606T	0,08+6  mm²	BW 1715	
BW 1608	0,5+6  mm²	BW 1720/B6	
BW 1725	420 mm	BW 1128BMX	150 mm
BW 1725CR	250 mm	BW 1149F	0,2+6  mm²
BW 1737NX	270 mm	BW 1602	0,75+6  mm²
		BW 1603	1,25+5,5  mm²

2400 RSC24AXXL/PF

024004998

3,8 kg

NOK 1390,-

**Perforated tool panel
with supports,
for mobile roller cab RSC24AXXL**

**RSC24AXXL**

131 Kg

NOK 21250,-

**Mobile roller cab with 8 drawers
and anti-tilt system,
long model**

- 1 fully removable drawer (1,176x367 mm), with ball bearing slides
- 7 fully removable drawers (882x367 mm), with ball bearing slides:
6 drawers 70 mm high
1 drawer 140 mm high
- Worktop made from stainless steel coated MDF, with holes for vice item 1599F/125 or 1599GI/125 (to be ordered separately) and 6 tote trays
- Sturdy nylon fronts, with built-in label holders
- Drawer bases protected by foamed rubber mats
- Removable side compartment, with ball bearing slides, with shelf and lock
- 4 castors, Ø 150 mm: 2 fixed and 2 steering with brakes
- 3 safety locks
- Built-in paper roll holder
- Built-in bottle holder
- Static load capacity: 1,100 kg
- Following trays can be added:
up to 8 EVA foam or ABS thermoformed trays in drawer 1,176x367 mm
up to 6 EVA foam or ABS thermoformed trays in drawer 882x367 mm


1100 kg



Ral 2011	Ral 3000	Ral 7016
Ral 7016	Ral 7016	Ral 7016
024004781	024004783	024004787

n°		Max
1	70 mm (1.176x367 mm)	40 kg
6	70 mm (882x367 mm)	30 kg
1	140 mm (882x367 mm)	35 kg

1020 mm
550 mm
1330 mm



C27S

20 Kg

NOK 7790,-

PRICE WITHOUT TOOLS

Trolley

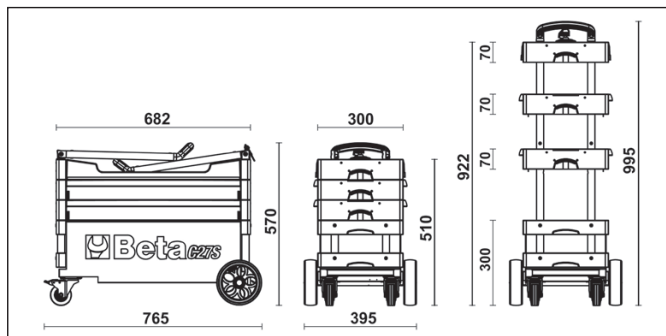
Folding tool trolley. Its unique patented design guarantees an effortless transport.

Features:


- 2 drawers, 588x277 mm, with ball bearing slides, for two-way opening
- Large lower object compartment, 588x277x220 mm
- Sheet metal frame
- 2 fixed castors, Ø 160 mm, and 2 steering castors with brake, Ø 100 mm
- Thermoplastic worktop with 6 built-in tool trays
- Centralized lock
- Can accommodate drawer partitions and MC foam tool trays



Ral 2011	Ral 3000	Ral 7016
027000201	027000203	027000202



h 70 mm	max 20 kg
------------	--------------

**96T/S5P**

000960946

NOK 645,-

Set of 5 offset hexagon key wrenches with handles

○ 2,5-3-4-5-6 mm

**97TTX/S6**

000970791

NOK 945,-

Set of 6 ball head offset key wrenches for Torx® head screws with handles

⊙ T10-T15-
T20-T25-
T30-T40



951**951/S6****NOK 1280,-**

009510687

THE ORIGINAL ONE

When this wrench was launched, back in 1980, it was a revolution. Designed to work on high-resistance screws, it is the name for quick handling, accurate fit and flexible use.

The hexagon T handle can be adjusted as required.

The hexagon ends are designed to transmit the maximum possible torque to the screw.

The rod length allows remarkable torques to be effortlessly applied to the screws.

Ongoing production improvements have translated, for example, into sandblasted finishes and sharp-edged hexagon ends which allow a better fit onto any screws, including damaged ones.

Laser marking results in a sturdier rod.

**Set of 6 T-handle wrenches
with three hexagon
male ends**

Ø 2,5-3-4-5-6-8 mm

**1741U**

017410450

NOK 478,-

**Ultra compact riveting pliers
with adjustable force
with 4 interchangeable nozzles**



**3 JAWS:
IMPROVED
RIVET GRIP**



L 200 mm

Ø mm	2,4	3	3,2	4	4,8
Aluminium	•	•	•	•	•
Steel	•	•	•	•	
Stainless steel	•	•	•	•	

3002

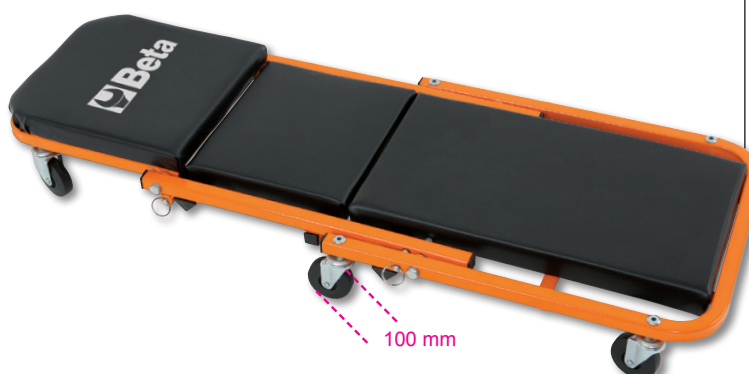
030020001

6,5 kg

NOK 1190,-

**Creeper
and seat**

- Steel frame
- PVC lining with upholstery
- Easily convertible into a creeper or a seat
- Max Weight 110kg



720LC/C3

007200653

NOK 398,-

3 impact sockets for wheel nuts, with polymeric inserts

○ 17-19-21 mm

12" 
 148x132x44 mm
**720B/C12**

007201912

 2,0 kg**NOK 1949,-**

12 bi-hex impact sockets

○ 10-11-12-13-14-17-19-22-24-27-30-32 mm

12" 
 195x80x55 mm

UNI/ISO 2725 DIN 3129

 007201530
720XZN/C6

007201530

 5,7 kg**NOK 1285,-**

6 impact socket drivers for XZN® head screws

○ M8-M10-M12-M14-M16-M18

12" 
 275x120x65 mm

UNI/ISO 2725 DIN 3129

1844SCK

018440316

NOK 2348,-

Automatic cable reel, with 3Gx1.5 mm² cable and SCHUKO type socket

- 3Gx1.5 mm² cable
- With thermal protection switch
- Length of cable out of drum: 1 m
- Supplied with 1.5 m incoming cable and SCHUKO type socket
- Rack mechanism can be disabled to keep cable pulled
- Max. power (rolled up): 1500W (230V-20°C)
- Max W. power (unrolled): 2500W (230V-20°C)
- Supplied with a 180° swivel bracket and an additional quick connection bracket
- Length of cable 15m+1m

**1900M 10X15**

019000115

NOK 2448,-

Automatic hose reel, shockproof plastic body, for air or water Ø 10x14 mm da 15 m

- Max. operating pressure: 15 bar
- Braided polyurethane hose
- Operating temperature range: -5 °C / +50 °C



Ø GAS BSP 3/8"

11045-11049


110460010

NOK 18.90,-

Abrasive steel and stainless steel cutting discs, thin, with flat centre

PREMIUM LINE
Ø 125 mm x 1 mm

A46Q EN 12413

**A46Q**


25 PCS.
NOK 448,-

11049

110350022

NOK 24.90,-

Abrasive steel and stainless steel cutting discs, thin, with flat centre

**A36Q**

25 PCS.
NOK 590,-

TOP LINE
Ø 125 mm x 1 mm

3029L/2T

030290120

NOK 4955,-

Long, lowered hydraulic jack, 2 t

Makes it possible to work on vehicles with a reduced height from the ground and internal lifting point.

Features:

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

H min-Max mm	L mm	L1 mm
75÷520	930	295

**1927P**

019270008


2,0 kg

NOK 2390,-

Reversible impact wrench

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle


Free speed	rpm	7.500
Impulse device		Double hammer
Max. torque	Nm	1750
Bolt capacity	Cl 8.8	M24●36 mm
Bolt capacity	Cl 12.9	M20●30 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	290

**1750 Nm****12"**

1263MC/D8**NOK 625,-**

012632008

Set of 8 coloured screwdrivers

**Beta**
GRIP

1260MC	0,4x2,5x50-0,5x3x75-0,8x4x100 1x5,5x125-1,2x6,5x150 mm
1262MC	PH0x3x60-PH1x4,5x80 PH2x6x100 mm

1203E/D8P**NOK 425,-**

012031018

Set of screwdrivers

**Beta**
evox

1201E	2,5x50-3x75-4x100 5,5x100-6,5x150 mm
1202E	PH0x60-PH1x80-PH2x100 mm

1838SW

018380142

Rechargeable, articulated LED inspection lamp and wireless charging

- Rechargeable 3.6V 3.350mAh Li-ion battery
- 2 charging modes:
 - wireless 1839BRW base
 - power supply with USB-C port
- Charging time:
 - 6.5h with wireless charging base
 - 4.5h with power supply
- Battery life: - front: 3-5h
- spot (head): 7h
- 3-LED battery level indicator
- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- Magnets on base and back
- IP65
- IK07



- **Dual light emission:**
 - front: LED COB, 3 light intensities: 250 - 500 - 1000 lumens
 - spot (head): LED SMD, 200 lumens

**1839BRW**

018390002

Wireless charging base, compatible with 1838POCKET, 1838SW, 1836AW, 1833XSW, 1833MW inspection lamps

- Two charging positions with magnetic connection, for simultaneous use
- With pull-out support for wireless mobile phone charging
- Charging status LED indicator
- Max. input: 10W x2
- Input: AC 100-240V 50/60Hz
- Output: DC 12V 1.5A
DC 9V 2A
DC 5V 3A
- USB-C port
- IP20
- IK07



- **Can be hung on wall through:**
 - 3 strong magnets on back
 - 2 screw holes



1497/C23

014970200

NOK 2345,-

Assortment of 23 tools
for releasing electrical connectors



440x250x70 mm

**1687/S4**

016870150

NOK 285,-

Set of 4 engineer's
precision scribes,
with handles



1687/S4 1687A-1687AC
1687D-1687U

1715I

017150020

NOK 325,-

Telescopic joint inspection mirror
with 5x magnification



L mm	D mm
250÷720	55

Nonslip PVC handle

Inspection mirror and handle made from stainless steel

961N



009610030

NOK 4690,-**NEW!**

Electronic videoscope with flexible,
rotating probe

- TFT LCD 5" screen
- Supports SD cards
- Video and image recording
- 4 LEDs
- Power supply via USB port (built-in battery)
- Rotating probe
- High resolution
- Camera 6mm

Discover the videoscope, 961N, your versatile partner for all jobs! Based on the probe that can be rotated 360° and the double lit camera reaching the most inaccessible points has never been so easy. Defects and problems can be found easily and accurately. And with the new TFT LCD 5" display and outstanding resolution (1920x1080), you can enjoy sharp, bright images and videos, like never before. Choose the videoscope, 961N, for uncompromised quality.



862F/A7

008620950

NOK 519,-

7 magnetic bits,
hexagon sockets,
in plastic case



5,5-6-7-8-10-12-13 mm

1370

013700053

FROM NOK 148,-

Engineer's hammer, wooden shaft



UNI 7778 DIN 1041

	g	A mm	L mm	L1 mm			NOK
	300	23	300	105	5	013700053	168,-
	500	27	320	118	5	013700055	208,-
	800	33	350	130	4	013700058	258,-
	1000	36	360	135	4	013700060	318,-
	1500	42	380	145	2	013700065	368,-
	2000	47	400	155	1	013700070	448,-

960KC-M8/M9/M10

009600801

NOK 4489,-

assortment of tools for removing
broken or damaged glow plugs

380x290x50 mm - 2,3 kg

- For spark plugs with threads M8-M9-M10

**1149F**

011490010

NOK 218,-

Front wire stripping pliers with cutting blade, self
adjusting

- Self-adjustment to wire diameters - 0,2-6 mm
- Adjustable stripping length
- Insulating cutting pressure adjustment
- Built-in cutting device



RENEGADE

METAL
FREEEN ISO
20345
2022

NEW!

THE NEW SAFETY FOOTWEAR RANGE

Renegade has been designed to provide uncompromising safety and style.

The range, which comprises 6 models in unique colours and materials, perfectly suits those interested in standing out in any working environment. Renegade relies on a design inspired by latest generation sports shoes, superior cushioning and remarkable support to provide comfort all day long.

7341Y

RENEGADE woven fabric shoe, hard-wearing and breathable, yellow details

NOK 1390,-

S1PS FO SR HRO

Sizes available: from 37 to 48
from 073410637 to 073410648



7342N

RENEGADE microfibre shoe, water-repellent

NOK 1490,-

S3S FO SR HRO

Sizes available: from 37 to 48
from 073420537 to 073420548



Beta
O-Gravity

METAL
FREEEN ISO
20345
2011

- EVA outsole with durable nitrile rubber tread
- Heel stability support
- Composite fibre penetration-proof insole

EXTREMELY LIGHT

LESS THAN 500 g

APPROXIMATE WEIGHT FOR SIZE 42

7371V

450 g

Mesh fabric shoe, ultrabreathable. Heel stability support, traditional lacing, wide fit. EVA outsole with durable nitrile rubber tread

- Composite toe cap
- Composite fibre penetration-proof insole
- REMARKABLY LIGHTWEIGHT: approximate weight, size 42: 450 g



NOK 1295,-



S1PS HRO FO SR ESD

Sizes available: from 38 to 48
from 073720038 to 073720048

7553Work t-shirt made from jersey cotton, 150 g/m²**NOK 145,-****NEW!****7553G**
Grey**7553V**
Sage green**7553BL**
Blue**7553N**
Black**100% COTTON**

		XS	S	M	L	XL	2XL	3XL
7553BL		075530300	075530301	075530302	075530303	075530304	075530305	075530306
7553G		075530400	075530401	075530402	075530403	075530404	075530405	075530406
7553N		075530500	075530501	075530502	075530503	075530504	075530505	075530506
7553V		075530600	075530601	075530602	075530603	075530604	075530605	075530606

7665N**NOK 585,-**Hoodie, long-zipped, 280 g/m², black
60% cotton, 40% polyester**SUBJECT
TO AVAILABILITY**

	XS	S	M	L	XL	2XL	3XL
	076650000	076650001	076650002	076650003	076650004	076650005	076650006

7552G**NOK 210,-**Three-button work polo shirt,
made from piqué
cotton, 200 g/m²,
melange grey

	XS	S	M	L	XL	2XL	3XL
	075520400	075520401	075520402	075520403	075520404	075520405	075520406

7650B**NOK 885,-**

Stretch work trousers, multipocket style,
90% nylon - 10% spandex, 260 g/m², blue
Knee pad pockets, rear pockets and leg bottoms
reinforced in polyester 600D, tearproof crotch

SUBJECT
TO AVAILABILITY

CE



	XS 46	S 48	M 50	L 52	XL 54	2XL 56	3XL 58
	076500100	076500101	076500102	076500103	076500104	076500105	076500106

9563U

095630020

NOK 4995,-

Office armchair, ergonomic

- Back height: 97 cm
- Seat dimensions: 50 cm x 53 cm
- Overall chair height: 133-144 cm
- Base: 35 cm (leg length)
x 49 cm (height)

**9593A**

095930050

NOK 2839,-

Chronograph, steel case, 5ATM
water resistant, silicon strap

**9594**

095940051

NOK 320,-

Clock complete with thermometer
and hygrometer, 26cm diameter



Beta Action

NICOM A/S®